KIESELSTEIN®
WIRE SOLUTIONS

Drahtführungsrollen

Wire guiding rolls

Einsatzzweck

Zur Führung von Draht während des Zieh- oder Schälvorgangs z. B. beim Einlauf in die Ziehmaschine.

Range of application

For guiding wire during the drawing or draw-peeling process, e.g. at the inlet of the drawing machine.

Technische Eigenschaften

V-förmige Laufrollen

Öffnungswinkel 90°

Durchgehende Bohrung für Aufnahme von 2 Wälzlagern

Aluminium/Stahl mit Keramikbeschichtung

Lieferbar als Einzelrollen oder als Rollenpaket

Sonderausführungen auf Anfrage

Technical characteristics

V-shaped running rolls

Opening angle 90°

Through bore for reception of 2 antifriction bearings

Aluminium/steel with ceramic coating

Available as individual rolls or package of rolls

Special designs available on request

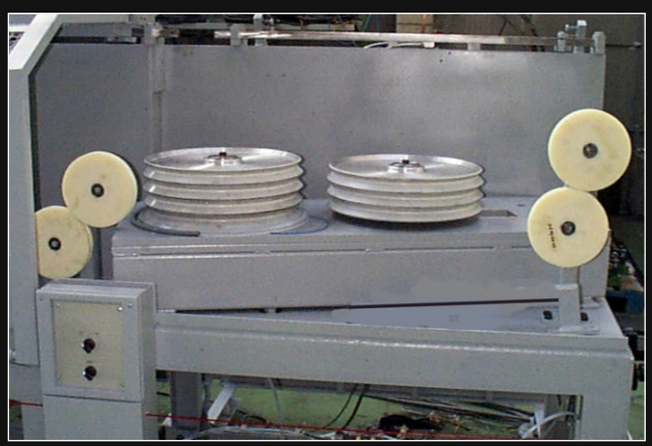

Durchmesser der Laufrollen (mm) / Diameter of running rolls (mm)

40 63 75 100 125 160 200 250 300 350 400 500 600

KIESELSTEIN International GmbH

Erzbergerstraße 3
09116 Chemnitz, Germany

Phone: +49 371 91 04 100
Fax: +49 371 91 04 105

info@kieselstein.com

www.kieselstein.com